


# Wirewound Potentiometer



## Series CLR 1100

- Smaller design
- General purpose panel control
- Dual gang units available
- Robust construction
- RoHS compliant

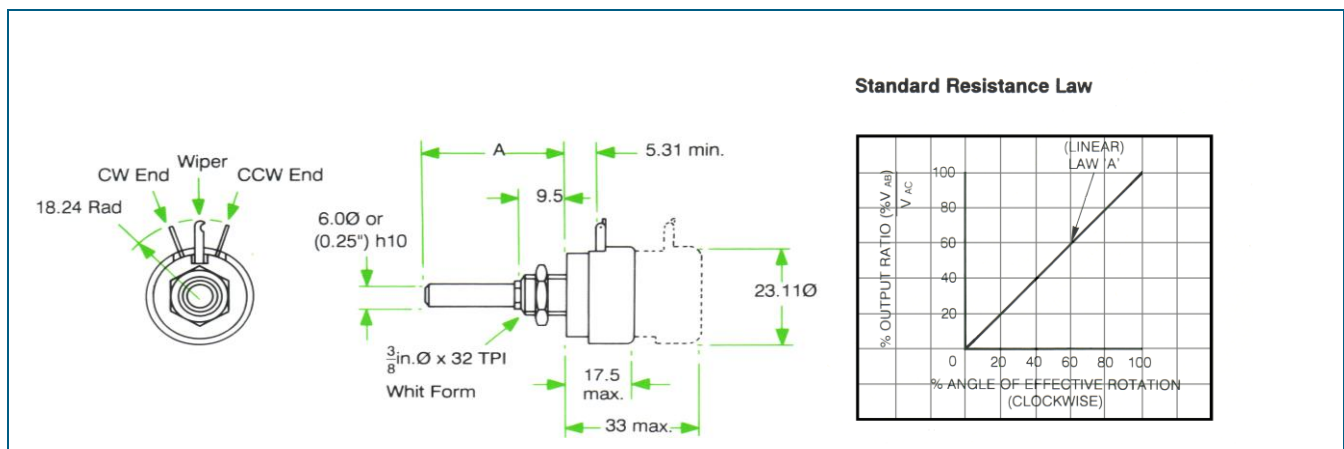

## Technical data

<b>Standard resistance range</b>	50 Ohms to 50,000 Ohms	<b>Power rating</b>	1.0 W @ 20°C (0.5W @ 70°C)
<b>Selection tolerance</b>	+/- 10% (+/- 5% also available)	<b>Isolation voltage</b>	1000 V a.c. peak
<b>Angle of effective rotation</b>	275° +/- 5°	<b>Rotational Noise</b>	100 Ohms E.N.R. maximum
<b>Total mechanical rotation</b>	285° +/- 5°	<b>Linearity</b>	+/- 1.0% typical
<b>Starting torque</b>	7 to 35 mNm	<b>End stop torque</b>	800 mNm maximum
<b>Rotational life</b>	20,000 shaft revolutions		

General purpose wirewound panel control of robust and reliable construction. Phenolic body moulding; beryllium copper contact; nickel plated brass spindle and bush; silver plated brass tags