
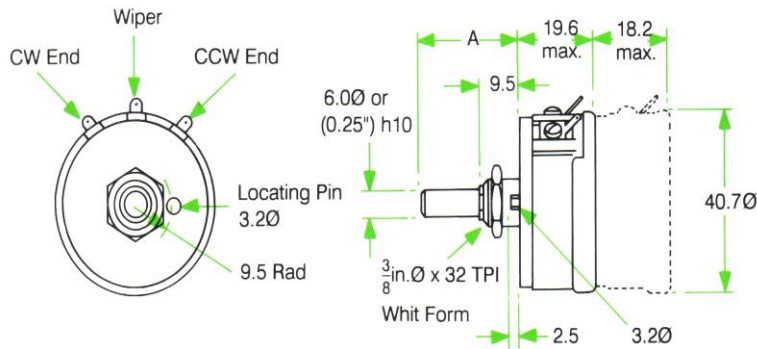



# Wirewound Potentiometer

## Series CLR 4200

- Humidity proof construction
- Wirewound panel control
- Linear and non-linear laws
- Up to 4 gangs available
- Screw terminations available
- 360° mechanical rotation available

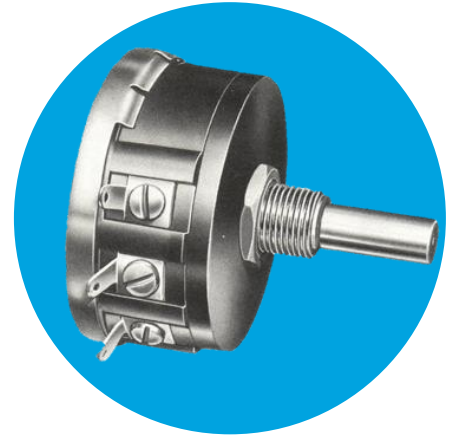

Standard Resistance Laws

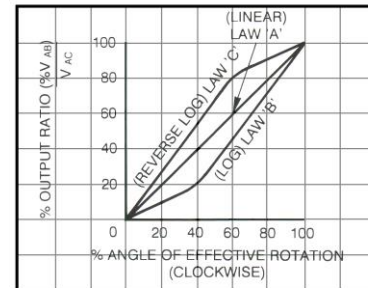

## Technical data

<b>Standard resistance range</b>	50 Ohms to 100,000 Ohms	<b>Power rating</b>	2.0 @ 20°C (1.0W @ 70°C)
<b>Selection tolerance</b>	+/- 10% (+/- 5% also available)	<b>Isolation voltage</b>	1000 V a.c. peak
<b>Angle of effective rotation</b>	270° +/- 5°	<b>Rotational Noise</b>	100 Ohms E.N.R. maximum
<b>Total mechanical rotation</b>	290° +/- 10°	<b>Linearity</b>	+/- 1.0% typical
<b>Starting torque</b>	7 to 70 mNm	<b>End stop torque</b>	1100 mNm maximum
<b>Rotational life</b>	25,000 shaft revolutions		

High quality sealed, general purpose wirewound panel control of robust and reliable construction. Phenolic body moulding; nickel silver contact; nickel plated brass spindle and bush; hot tinned dipped brass tags.